


A8289 Fastener Spacing for C-36 87-> Nicro Xtrack, Retrofit Only

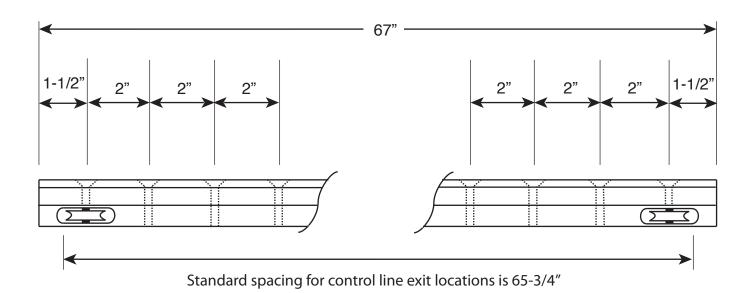

All bolt holes are for 1/4" flathead screws.

Control line cleats or dodger conversion blocks:

Year of boat: _____

Hull #: _____

This is the standard fastener hole positioning. If your application doesn't match, please contact us for indexing. Your traveler bar will need to be sent to us to duplicate the fastener position. A small charge for this will apply.

Please compare the dimensions on this drawing to the traveler you are replacing. Remember: This is a special order item; your order cannot be cancelled, returned, exchanged, or modified once your order is accepted, so please choose and measure carefully. Complete your order by agreeing to these terms and signing below.

X_

signature

printed name