



DOWSIL™ Silicone Weatherproofing Sealant

Neutral, one-part silicone sealant

Features & Benefits

- Ideal for expansion, contraction, perimeter and other movement joints
- Neutral cure – suitable for use on coated glass, galvanized steel, masonry and other porous and non-porous substrates
- Extension/compression movement capability of up to ±50 percent of the original joint width
- Excellent weatherability, virtually unaffected by sunlight, rain, snow, ozone
- Excellent unprimed adhesion to a wide variety of construction materials and building components
- Ease of application – ready to use as supplied
- Excellent rheology, low string upon gunning

Composition

- One-part, neutral-cure, RTV silicone sealant

Applications

- DOWSIL™ Silicone Weatherproofing Sealant is a specified, premium performance weather sealing product specifically designed for general glazing and weather sealing in curtain wall and building facades.

Typical Properties

Specification Writers: These values are not intended for use in preparing specifications.

Test ¹	Property	Unit	Result
Uncured – As Tested at 50% RH and 23°C (73°F)			
ASTM C639	Flow (sag or slump)	inches (mm)	0
ASTM C603	Extrusion Rate	g/minute	140
	Working Time	minutes	20
ASTM C679	Tack-free Time, 77°F, 50% RH	minutes	40
	Curing Time at 77°F (25°C) and 50% RH	days	7–14
	VOC Content ²	g/L	31

1. ASTM – American Society for Testing and Materials.
2. Based on South Coast Air Quality Management District of California. Maximum VOC is listed both inclusive and exclusive of water and exempt compounds.

Typical Properties (Cont.)

Test	Property	Unit	Result
As Cured – After 21 days at 50% RH and 77°F (25°C)			
ASTM D2240	Durometer Hardness, Shore A	points	34
ASTM C794	Peel Strength	lb/in (kg/cm)	30 (5.4)
ASTM C719	Joint Movement Capability	percent	± 50
ASTM C1135	Tensile Adhesion Strength		
	At 25% extension	Psi (MPa)	40 (0.276)
	At 50% extension	Psi (MPa)	60 (0.414)

Description


DOWSIL™ Silicone Weatherproofing Sealant is a one-part, neutral-cure, architectural grade sealant. It easily extrudes in any weather and cures at ambient temperature by reaction with moisture in the air to form a durable, flexible silicone rubber seal.

How to Use

Please consult the Dow Americas Technical Manual, Form No. 62-1112, for detailed information on state-of-the-art application methods and joint design. Please contact your local Dow Sales Application Engineer for specific advice.

Preparation

Clean all joints removing all foreign matter and contaminants such as grease, oil, dust, water, frost, surface dirt, old sealants or glazing compounds and protective coatings.

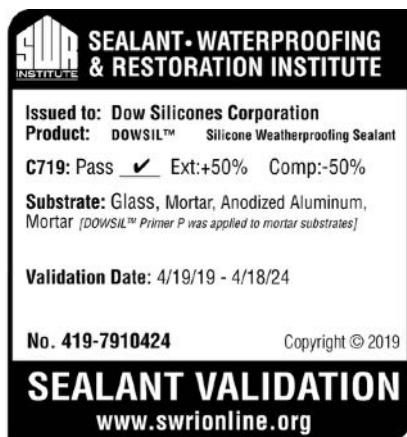

Application Method

Install backing material or joint filler, setting blocks, spacer shims and tapes. Mask areas adjacent to joints to ensure neat sealant lines. Primer is generally not required on non-porous surfaces, but maybe necessary for optimal sealant of certain porous surfaces. A test placement is always recommended. Apply DOWSIL™ Silicone Weatherproofing Sealant in a continuous operation using a positive pressure. (The sealant can be applied using many types of air-operated guns and most types of bulk dispensing equipment. Before a skin forms (typically within 15 minutes), tool the sealant with light pressure to spread the sealant against backing material and the joint surfaces. Remove masking tape as soon as the bead is cured.

RESTRICTED – May be shared with anyone
 trademark of The Dow Chemical Company ("Dow") or an affiliated company of Dow

DOWSIL™ Silicone Weatherproofing Sealant
 © 2019 The Dow Chemical Company. All rights reserved.

Approvals/ Specifications

Meets the requirements of:

- ASTM C920 Type S, Grade NS, Class 50, Use NT, M, G, A



SGBP 2019-2723

Colors

This product is available in 7 colors: black, gray, bronze, limestone, camel, precast white and white. Custom colors may be ordered to match virtually any substrate.

Handling Precautions

PRODUCT SAFETY INFORMATION REQUIRED FOR SAFE USE IS NOT INCLUDED IN THIS DOCUMENT. BEFORE HANDLING, READ PRODUCT AND SAFETY DATA SHEETS AND CONTAINER LABELS FOR SAFE USE, PHYSICAL AND HEALTH HAZARD INFORMATION. THE SAFETY DATA SHEET IS AVAILABLE ON THE DOW WEBSITE AT DOW.COM, OR FROM YOUR DOW SALES APPLICATION ENGINEER, OR DISTRIBUTOR, OR BY CALLING DOW CUSTOMER SERVICE.

Usable Life and Storage

When stored at or below 30°C (86°F) in the original unopened containers, DOWSIL™ 791 Silicone Weatherproofing Sealant has a usable life of 12 months from the date of manufacture. Refer to product packaging for “Use By” date.

Packaging Information

DOWSIL™ Silicone Weatherproofing Sealant is available in 10.3 fl oz (305 mL) disposable plastic cartridges that fit ordinary caulking guns, 20 fl oz (590 mL) sausages.

Limitations

DOWSIL™ Silicone Weatherproofing Sealant is not approved for use as a structural sealant.

DOWSIL™ Silicone Weatherproofing Sealant should not be used:

- In below-grade applications
- When surface temperatures exceed 50°C (122°F)
- On surfaces that are continuously immersed in water
- On building materials that bleed oils, plasticizers or solvents, green or partially vulcanized rubber gaskets or tapes
- On frost-laden or wet surfaces
- In totally confined joints (the sealant requires atmospheric moisture for cure)
- If the sealant is intended to be painted (paints do not typically adhere to most silicone sealants)
- To surfaces in direct contact with food or other food-grade applications

This product is neither tested nor represented as suitable for medical or pharmaceutical uses.

Health and Environmental Information

To support customers in their product safety needs, Dow has an extensive Product Stewardship organization and a team of product safety and regulatory compliance specialists available in each area.

For further information, please see our website, dow.com or consult your local Dow representative.

dow.com

LIMITED WARRANTY INFORMATION – PLEASE READ CAREFULLY

The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that our products are safe, effective, and fully satisfactory for the intended end use. Suggestions of use shall not be taken as inducements to infringe any patent.

Dow's sole warranty is that our products will meet the sales specifications in effect at the time of shipment.

Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted.

TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, DOW SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY.

DOW DISCLAIMS LIABILITY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES.





SAFETY DATA SHEET

THE DOW CHEMICAL COMPANY

Product name: DOWSIL™ Silicone Weatherproofing Sealant Grey

Issue Date: 03/02/2021

Print Date: 03/03/2021

THE DOW CHEMICAL COMPANY encourages and expects you to read and understand the entire (M)SDS, as there is important information throughout the document. We expect you to follow the precautions identified in this document unless your use conditions would necessitate other appropriate methods or actions.

1. IDENTIFICATION

Product name: DOWSIL™ Silicone Weatherproofing Sealant Grey

Recommended use of the chemical and restrictions on use

Identified uses: Sealant.

COMPANY IDENTIFICATION

THE DOW CHEMICAL COMPANY
2211 H.H. DOW WAY
MIDLAND MI 48674
UNITED STATES

Customer Information Number:

800-258-2436
SDSQuestion@dow.com

EMERGENCY TELEPHONE NUMBER

24-Hour Emergency Contact: CHEMTREC +1 800-424-9300

Local Emergency Contact: 800-424-9300

2. HAZARDS IDENTIFICATION

Hazard classification

GHS classification in accordance with the OSHA Hazard Communication Standard (29 CFR 1910.1200)

Reproductive toxicity - Category 2

Label elements

Hazard pictograms



Signal word: **WARNING!**

Hazards

Suspected of damaging fertility or the unborn child.

Precautionary statements

Prevention

Obtain special instructions before use.
Do not handle until all safety precautions have been read and understood.
Use only outdoors or in a well-ventilated area.
Wear protective gloves, protective clothing, eye protection and/or face protection.

Response

IF exposed or concerned: Get medical advice/ attention.

Storage

Store locked up.

Disposal

Dispose of contents and/or container to an approved waste disposal plant.

Other hazards

No data available

3. COMPOSITION/INFORMATION ON INGREDIENTS

Chemical nature: Silicone, Sealant

This product is a mixture.

Component	CASRN	Concentration
Octamethyl Cyclotetrasiloxane	556-67-2	>= 0.021 - <= 0.18 %

4. FIRST AID MEASURES

Description of first aid measures

General advice:

First Aid responders should pay attention to self-protection and use the recommended protective clothing (chemical resistant gloves, splash protection). If potential for exposure exists refer to Section 8 for specific personal protective equipment.

Inhalation: Move person to fresh air and keep comfortable for breathing; consult a physician.

|| Skin contact: Wash off with plenty of water.

Eye contact: Flush eyes thoroughly with water for several minutes. Remove contact lenses after the initial 1-2 minutes and continue flushing for several additional minutes. If effects occur, consult a physician, preferably an ophthalmologist.

Ingestion: If swallowed, seek medical attention. Do not induce vomiting unless directed to do so by medical personnel.

Most important symptoms and effects, both acute and delayed:

Aside from the information found under Description of first aid measures (above) and Indication of immediate medical attention and special treatment needed (below), any additional important symptoms and effects are described in Section 11: Toxicology Information.

Indication of any immediate medical attention and special treatment needed

Notes to physician: No specific antidote. Treatment of exposure should be directed at the control of symptoms and the clinical condition of the patient. Skin contact may aggravate preexisting dermatitis.

5. FIREFIGHTING MEASURES

Extinguishing media

Suitable extinguishing media: Water spray. Alcohol-resistant foam. Carbon dioxide (CO₂). Dry chemical.

Unsuitable extinguishing media: None known..

Special hazards arising from the substance or mixture

Hazardous combustion products: Metal oxides. Formaldehyde. Carbon oxides. Silicon oxides. Carbon monoxide, carbon dioxide and unburned hydrocarbons (smoke)..

Unusual Fire and Explosion Hazards: Exposure to combustion products may be a hazard to health..

Advice for firefighters

Fire Fighting Procedures: Use water spray to cool unopened containers.. Evacuate area.. Collect contaminated fire extinguishing water separately. This must not be discharged into drains.. Fire residues and contaminated fire extinguishing water must be disposed of in accordance with local regulations..

Use extinguishing measures that are appropriate to local circumstances and the surrounding environment. Remove undamaged containers from fire area if it is safe to do so.

Special protective equipment for firefighters: In the event of fire, wear self-contained breathing apparatus.. Use personal protective equipment..

6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures: Use personal protective equipment. Follow safe handling advice and personal protective equipment recommendations.

Environmental precautions: Discharge into the environment must be avoided. Prevent further leakage or spillage if safe to do so. Retain and dispose of contaminated wash water. Local authorities should be advised if significant spillages cannot be contained.

Methods and materials for containment and cleaning up: Wipe up or scrape up and contain for salvage or disposal. Local or national regulations may apply to releases and disposal of this material, as well as those materials and items employed in the cleanup of releases. You will need to determine which regulations are applicable. For large spills, provide dyking or other appropriate containment to keep material from spreading. If dyked material can be pumped, store recovered material in appropriate container.

See sections: 7, 8, 11, 12 and 13.

7. HANDLING AND STORAGE

Precautions for safe handling: Avoid contact with eyes. Do not swallow. Avoid prolonged or repeated contact with skin. Take care to prevent spills, waste and minimize release to the environment. Handle in accordance with good industrial hygiene and safety practice. CONTAINERS MAY BE HAZARDOUS WHEN EMPTY. Since emptied containers retain product residue follow all (M)SDS and label warnings even after container is emptied.

Use only with adequate ventilation. See Engineering measures under EXPOSURE CONTROLS/PERSONAL PROTECTION section.

Conditions for safe storage: Keep in properly labelled containers. Store locked up. Store in accordance with the particular national regulations.

Do not store with the following product types: Strong oxidizing agents.

Unsuitable materials for containers: None known.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Control parameters

If exposure limits exist, they are listed below. If no exposure limits are displayed, then no values are applicable.

Component	Regulation	Type of listing	Value
Octamethyl Cyclotetrasiloxane	US WEEL	TWA	10 ppm

Exposure controls

Engineering controls: Use local exhaust ventilation, or other engineering controls to maintain airborne levels below exposure limit requirements or guidelines. If there are no applicable exposure limit requirements or guidelines, general ventilation should be sufficient for most operations. Local exhaust ventilation may be necessary for some operations.

Individual protection measures

Eye/face protection: Use safety glasses (with side shields).

Skin protection

Hand protection: Use gloves chemically resistant to this material. Examples of preferred glove barrier materials include: Butyl rubber. Neoprene. Nitrile/butadiene rubber ("nitrile" or "NBR"). Ethyl vinyl alcohol laminate ("EVAL"). Polyvinyl alcohol ("PVA"). Polyvinyl chloride ("PVC" or "vinyl"). Viton. Examples of acceptable glove barrier materials include: Natural rubber ("latex"). NOTICE: The selection of a specific glove for a particular application and duration of use in a workplace should also take into account all relevant workplace factors such as, but not limited to: Other chemicals which may be handled, physical requirements (cut/puncture protection,

dexterity, thermal protection), potential body reactions to glove materials, as well as the instructions/specifications provided by the glove supplier.

Other protection: Use protective clothing chemically resistant to this material.

Selection of specific items such as face shield, boots, apron, or full body suit will depend on the task.

Respiratory protection: Respiratory protection should be worn when there is a potential to exceed the exposure limit requirements or guidelines. If there are no applicable exposure limit requirements or guidelines, wear respiratory protection when adverse effects, such as respiratory irritation or discomfort have been experienced, or where indicated by your risk assessment process. For most conditions, no respiratory protection should be needed; however, if handling at elevated temperatures without sufficient ventilation, use an approved air-purifying respirator.

The following should be effective types of air-purifying respirators: Organic vapor cartridge.

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance

Physical state	paste
Color	grey
Odor	none
Odor Threshold	No data available
pH	Not applicable
Melting point/range	No data available
Freezing point	No data available
Boiling point (760 mmHg)	Not applicable
Flash point	Not applicable
Evaporation Rate (Butyl Acetate = 1)	Not applicable
Flammability (solid, gas)	Not classified as a flammability hazard
Lower explosion limit	No data available
Upper explosion limit	No data available
Vapor Pressure	Not applicable
Relative Vapor Density (air = 1)	No data available
Relative Density (water = 1)	1.51
Water solubility	No data available
Partition coefficient: n-octanol/water	No data available
Auto-ignition temperature	No data available
Decomposition temperature	No data available
Dynamic Viscosity	Not applicable
Kinematic Viscosity	Not applicable
Explosive properties	Not explosive
Oxidizing properties	The substance or mixture is not classified as oxidizing.

Molecular weight No data available
Particle size No data available

NOTE: The physical data presented above are typical values and should not be construed as a specification.

10. STABILITY AND REACTIVITY

Reactivity: Not classified as a reactivity hazard.

Chemical stability: Stable under normal conditions.

Possibility of hazardous reactions: Can react with strong oxidizing agents.

Conditions to avoid: None known.

Incompatible materials: Avoid contact with oxidizing materials.

Hazardous decomposition products:

Decomposition products can include and are not limited to: Formaldehyde.

11. TOXICOLOGICAL INFORMATION

Toxicological information appears in this section when such data is available.

Information on likely routes of exposure

Eye contact, Skin contact, Ingestion.

Acute toxicity (represents short term exposures with immediate effects - no chronic/delayed effects known unless otherwise noted)

Acute oral toxicity

Low toxicity if swallowed. Small amounts swallowed incidentally as a result of normal handling operations are not likely to cause injury; however, swallowing larger amounts may cause injury. May cause abdominal discomfort or diarrhea.

As product: Single dose oral LD50 has not been determined.

Based on information for component(s):

LD50, > 2,000 mg/kg Estimated.

Information for components:

Octamethyl Cyclotetrasiloxane

LD50, Rat, male, > 4,800 mg/kg No deaths occurred at this concentration.

Acute dermal toxicity

Prolonged skin contact is unlikely to result in absorption of harmful amounts.

As product: The dermal LD50 has not been determined.

Based on information for component(s):
LD50, > 2,000 mg/kg Estimated.

Information for components:

Octamethyl Cyclotetrasiloxane

LD50, Rat, male and female, > 2,400 mg/kg No deaths occurred at this concentration.

Acute inhalation toxicity

Brief exposure (minutes) is not likely to cause adverse effects. Vapor from heated material may cause respiratory irritation.

As product: The LC50 has not been determined.

Information for components:

Octamethyl Cyclotetrasiloxane

LC50, Rat, male and female, 4 Hour, dust/mist, 36 mg/l OECD Test Guideline 403

Skin corrosion/irritation

Based on information for component(s):
Brief contact is essentially nonirritating to skin.
May cause drying and flaking of the skin.

Information for components:

Octamethyl Cyclotetrasiloxane

Brief contact is essentially nonirritating to skin.

Serious eye damage/eye irritation

Based on information for component(s):
May cause slight temporary eye irritation.
May cause mild eye discomfort.

Information for components:

Octamethyl Cyclotetrasiloxane

Essentially nonirritating to eyes.

Sensitization

For skin sensitization:
Contains component(s) which did not cause allergic skin sensitization in guinea pigs.
Contains component(s) which have not demonstrated the potential for contact allergy in mice.

For respiratory sensitization:
No relevant data found.

Information for components:

Octamethyl Cyclotetrasiloxane

Did not cause allergic skin reactions when tested in guinea pigs.

For respiratory sensitization:
No relevant data found.

Specific Target Organ Systemic Toxicity (Single Exposure)

Evaluation of available data suggests that this material is not an STOT-SE toxicant.

Information for components:

Octamethyl Cyclotetrasiloxane

Evaluation of available data suggests that this material is not an STOT-SE toxicant.

Aspiration Hazard

Based on physical properties, not likely to be an aspiration hazard.

Information for components:

Octamethyl Cyclotetrasiloxane

May be harmful if swallowed and enters airways.

Chronic toxicity (represents longer term exposures with repeated dose resulting in chronic/delayed effects - no immediate effects known unless otherwise noted)

Specific Target Organ Systemic Toxicity (Repeated Exposure)

Based on available data for the component(s), repeated exposures are not anticipated to cause significant adverse effects.

Information for components:

Octamethyl Cyclotetrasiloxane

In animals, effects have been reported on the following organs:

Kidney.

Liver.

Respiratory tract.

Female reproductive organs.

Carcinogenicity

Contains a component(s) that is/are not expected to be bioavailable due to the physical state of the material under normal handling and processing conditions.

Information for components:

Octamethyl Cyclotetrasiloxane

Results from a 2 year repeated vapour inhalation exposure study to rats of octamethylcyclotetrasiloxane (D4) indicate effects (benign uterine adenomas) in the uterus of female animals. This finding occurred at the highest exposure dose (700 ppm) only. Studies to date have not demonstrated if these effects occur through pathways that are relevant to humans. Repeated exposure in rats to D4 resulted in protoporphyrin accumulation in the liver. Without knowledge of the specific mechanism leading to the protoporphyrin accumulation the relevance of this finding to humans is unknown.

Teratogenicity

Contains component(s) which did not cause birth defects or any other fetal effects in lab animals.

Information for components:

Octamethyl Cyclotetrasiloxane

Did not cause birth defects or any other fetal effects in laboratory animals.

Reproductive toxicity

Contains component(s) which have interfered with fertility in animal studies. In animal studies on component(s), effects on reproduction were seen only at doses that produced significant toxicity to the parent animals.

Information for components:

Octamethyl Cyclotetrasiloxane

In laboratory animal studies, effects on reproduction have been seen only at doses that produced significant toxicity to the parent animals. In animal studies, has been shown to interfere with fertility.

Mutagenicity

In vitro genetic toxicity studies were negative for component(s) tested. Genetic toxicity studies in animals were negative for component(s) tested.

Information for components:

Octamethyl Cyclotetrasiloxane

In vitro genetic toxicity studies were negative. Animal genetic toxicity studies were negative.

12. ECOLOGICAL INFORMATION

Ecotoxicological information appears in this section when such data is available.

Toxicity

Octamethyl Cyclotetrasiloxane

Acute toxicity to fish

Not expected to be acutely toxic to aquatic organisms.

No toxicity at the limit of solubility

LC50, *Oncorhynchus mykiss* (rainbow trout), flow-through, 96 Hour, > 0.022 mg/l

No toxicity at the limit of solubility

LC50, *Cyprinodon variegatus* (sheepshead minnow), flow-through, 14 d, > 0.0063 mg/l

Acute toxicity to aquatic invertebrates

No toxicity at the limit of solubility

EC50, *Mysidopsis bahia* (opossum shrimp), flow-through test, 96 Hour, > 0.0091 mg/l

No toxicity at the limit of solubility

EC50, *Daphnia magna* (Water flea), flow-through test, 48 Hour, > 0.015 mg/l

Acute toxicity to algae/aquatic plants

No toxicity at the limit of solubility

ErC50, *Pseudokirchneriella subcapitata* (green algae), 72 Hour, Growth rate, > 0.022 mg/l

Chronic toxicity to fish

No toxicity at the limit of solubility
NOEC, Oncorhynchus mykiss (rainbow trout), 93 d, >= 0.0044 mg/l

Chronic toxicity to aquatic invertebrates

No toxicity at the limit of solubility
NOEC, Daphnia magna (Water flea), 21 d, >= 0.0079 mg/l

Persistence and degradability

Octamethyl Cyclotetrasiloxane

Biodegradability: Material is expected to biodegrade very slowly (in the environment). Fails to pass OECD/EEC tests for ready biodegradability.

10-day Window: Not applicable

Biodegradation: 3.7 %

Exposure time: 28 d

Method: OECD Test Guideline 310

Stability in Water (1/2-life)

Hydrolysis, DT50, 69.3 - 144 Hour, pH 7, Half-life Temperature 24.6 °C, OECD Test Guideline 111

Photodegradation

Atmospheric half-life: 16 d

Method: Estimated.

Bioaccumulative potential

Octamethyl Cyclotetrasiloxane

Bioaccumulation: Bioconcentration potential is high (BCF > 3000 or Log Pow between 5 and 7).

Partition coefficient: n-octanol/water(log Pow): 6.49 Measured

Bioconcentration factor (BCF): 12,400 Pimephales promelas (fathead minnow) Measured

Mobility in soil

Octamethyl Cyclotetrasiloxane

Partition coefficient (Koc): 16596 OECD Test Guideline 106

13. DISPOSAL CONSIDERATIONS

Disposal methods: DO NOT DUMP INTO ANY SEWERS, ON THE GROUND, OR INTO ANY BODY OF WATER. All disposal practices must be in compliance with all Federal, State/Provincial and local laws and regulations. Regulations may vary in different locations. Waste characterizations and compliance with applicable laws are the responsibility solely of the waste generator. AS YOUR SUPPLIER, WE HAVE NO CONTROL OVER THE MANAGEMENT PRACTICES OR MANUFACTURING PROCESSES OF PARTIES HANDLING OR USING THIS MATERIAL. THE INFORMATION PRESENTED HERE PERTAINS ONLY TO THE PRODUCT AS SHIPPED IN ITS INTENDED CONDITION AS DESCRIBED IN MSDS SECTION: Composition Information. FOR UNUSED & UNCONTAMINATED PRODUCT, the preferred options include sending to a licensed, permitted: Incinerator or other thermal destruction device. For additional information, refer to: Handling & Storage Information, MSDS Section 7 Stability & Reactivity Information, MSDS Section 10 Regulatory Information, MSDS Section 15

Treatment and disposal methods of used packaging: Empty containers should be recycled or otherwise disposed of by an approved waste management facility. Waste characterizations and compliance with applicable laws are the responsibility solely of the waste generator. Do not re-use containers for any purpose.

14. TRANSPORT INFORMATION

DOT

Not regulated for transport

Classification for SEA transport (IMO-IMDG):

Not regulated for transport

**Transport in bulk
according to Annex I or II
of MARPOL 73/78 and the
IBC or IGC Code**

Consult IMO regulations before transporting ocean bulk

Classification for AIR transport (IATA/ICAO):

Not regulated for transport

This information is not intended to convey all specific regulatory or operational requirements/information relating to this product. Transportation classifications may vary by container volume and may be influenced by regional or country variations in regulations. Additional transportation system information can be obtained through an authorized sales or customer service representative. It is the responsibility of the transporting organization to follow all applicable laws, regulations and rules relating to the transportation of the material.

15. REGULATORY INFORMATION

Superfund Amendments and Reauthorization Act of 1986 Title III (Emergency Planning and Community Right-to-Know Act of 1986) Sections 311 and 312

Reproductive toxicity

Superfund Amendments and Reauthorization Act of 1986 Title III (Emergency Planning and Community Right-to-Know Act of 1986) Section 313

This material does not contain any chemical components with known CAS numbers that exceed the threshold (De Minimis) reporting levels established by SARA Title III, Section 313.

Pennsylvania Right To Know

The following chemicals are listed because of the additional requirements of Pennsylvania law:

Components

Polydimethylsiloxane hydroxy-terminated
Calcium carbonate treated with stearic acid
Calcium carbonate (natural) treated with natural fatty acid

CASRN

70131-67-8
Not available
Not available

Calcium carbonate (synthetic) treated with synthetic fatty acid
Siloxanes and silicones, dimethyl

Not available
63148-62-9

California Prop. 65

WARNING: This product can expose you to chemicals including Methanol, which is/are known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.

United States TSCA Inventory (TSCA)

All components of this product are in compliance with the inventory listing requirements of the U.S. Toxic Substances Control Act (TSCA) Chemical Substance Inventory.

16. OTHER INFORMATION

Hazard Rating System

NFPA

Health	Flammability	Instability
0	1	0

HMIS

Health	Flammability	Physical Hazard
0*	1	0

* = Chronic Effects (See Hazards Identification)

Revision

Identification Number: 4127365 / A001 / Issue Date: 03/02/2021 / Version: 8.0

Most recent revision(s) are noted by the bold, double bars in left-hand margin throughout this document.

Legend

TWA	8-hr TWA
US WEEL	USA. Workplace Environmental Exposure Levels (WEEL)

Full text of other abbreviations

AllC - Australian Inventory of Industrial Chemicals; ASTM - American Society for the Testing of Materials; bw - Body weight; CERCLA - Comprehensive Environmental Response, Compensation, and Liability Act; CMR - Carcinogen, Mutagen or Reproductive Toxicant; DIN - Standard of the German Institute for Standardisation; DOT - Department of Transportation; DSL - Domestic Substances List (Canada); ECx - Concentration associated with x% response; EHS - Extremely Hazardous Substance; ELx - Loading rate associated with x% response; EmS - Emergency Schedule; ENCS - Existing and New Chemical Substances (Japan); ErCx - Concentration associated with x% growth rate response; ERG - Emergency Response Guide; GHS - Globally Harmonized System; GLP - Good Laboratory Practice; HMIS - Hazardous Materials Identification System; IARC - International Agency for Research on Cancer; IATA - International Air Transport Association; IBC - International Code for the Construction and Equipment of Ships carrying Dangerous Chemicals in Bulk; IC50 - Half maximal inhibitory concentration; ICAO - International Civil Aviation Organization; IECSC - Inventory of Existing Chemical Substances in China; IMDG - International Maritime Dangerous Goods; IMO - International Maritime Organization; ISHL - Industrial Safety and Health Law (Japan); ISO - International Organisation for Standardization; KECI - Korea Existing Chemicals Inventory; LC50 - Lethal Concentration to 50 % of a test population; LD50 - Lethal Dose to 50% of a test population

(Median Lethal Dose); MARPOL - International Convention for the Prevention of Pollution from Ships; MSHA - Mine Safety and Health Administration; n.o.s. - Not Otherwise Specified; NFPA - National Fire Protection Association; NO(A)EC - No Observed (Adverse) Effect Concentration; NO(A)EL - No Observed (Adverse) Effect Level; NOELR - No Observable Effect Loading Rate; NTP - National Toxicology Program; NZIoC - New Zealand Inventory of Chemicals; OECD - Organization for Economic Co-operation and Development; OPPTS - Office of Chemical Safety and Pollution Prevention; PBT - Persistent, Bioaccumulative and Toxic substance; PICCS - Philippines Inventory of Chemicals and Chemical Substances; (Q)SAR - (Quantitative) Structure Activity Relationship; RCRA - Resource Conservation and Recovery Act; REACH - Regulation (EC) No 1907/2006 of the European Parliament and of the Council concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals; RQ - Reportable Quantity; SADT - Self-Accelerating Decomposition Temperature; SARA - Superfund Amendments and Reauthorization Act; SDS - Safety Data Sheet; TCSI - Taiwan Chemical Substance Inventory; TSCA - Toxic Substances Control Act (United States); UN - United Nations; UNRTDG - United Nations Recommendations on the Transport of Dangerous Goods; vPvB - Very Persistent and Very Bioaccumulative

Information Source and References

This SDS is prepared by Product Regulatory Services and Hazard Communications Groups from information supplied by internal references within our company.

THE DOW CHEMICAL COMPANY urges each customer or recipient of this (M)SDS to study it carefully and consult appropriate expertise, as necessary or appropriate, to become aware of and understand the data contained in this (M)SDS and any hazards associated with the product. The information herein is provided in good faith and believed to be accurate as of the effective date shown above. However, no warranty, express or implied, is given. Regulatory requirements are subject to change and may differ between various locations. It is the buyer's/user's responsibility to ensure that his activities comply with all federal, state, provincial or local laws. The information presented here pertains only to the product as shipped. Since conditions for use of the product are not under the control of the manufacturer, it is the buyer's/user's duty to determine the conditions necessary for the safe use of this product. Due to the proliferation of sources for information such as manufacturer-specific (M)SDSs, we are not and cannot be responsible for (M)SDSs obtained from any source other than ourselves. If you have obtained an (M)SDS from another source or if you are not sure that the (M)SDS you have is current, please contact us for the most current version.

US